

ULTRA.DRY HRE Heat Regenerated Adsorption Dryer

NEW



ברלין טכנולוגיות בע"מ
שדרות גן רוהה 13, יבנה, 8122214
<http://www.berlintech.co.il/>
mail@berlintech.co.il
טלפון: 073-7597171
פקס: 08-6638120



ULTRAFILTER
THE FILTRATION MANUFACTURER

ULTRA.DRY HRE Heat Regenerated Adsorption Dryer

NEW

Why drying compressed air?

■ Compressed air is used in almost all areas of industrial manufacturing as a source of energy or processing. Compressed air needs to be dry, oilfree and clean in order to prevent costly production downtimes and losses in the production quality. The atmospheric air drawn in contains harmful substances, dirt particles and moisture in the form of water vapour, which condenses out in compressed air pipes and can lead to considerable damages (corrosion, freezing etc.).

■ Beneath compressed air fridge dryer, adsorption dryer represent the most common drying method for compressed air. Maximum efficiency and the highest operational safety, coupled with low operational costs are attributes that convey the advantages of the adsorption dryer. State of the art technology and selected materials are the basis for high operational safety.

■ Adsorption dryers are made of two - in some applications more - compressed air vessels filled with desiccant. Whilst one vessel is drying the incoming compressed air, the other vessel is regenerated.

■ Within the range of adsorption dryers we differ between heatless regenerated dryers and heat regenerated dryers. While heatless dryers are regenerated by a partial flow of more than 15 % of the dried compressed air, heat regenerated adsorption dryers type ULTRA.DRY HRE manages the desorption process without compressed air consumption. Compressed air is consumed for the cooling process only.

■ Therefore heat regenerated adsorption dryers are much more economical as their energy requirements for regeneration is much lower than those of heatless regenerated adsorption dryers despite using heater and blower for regeneration.



ULTRA.DRY HRE Heat Regenerated Adsorption Dryer


NEW

Quality products Made in Germany

- In order to produce heat regenerated dryers a considerable experience is required. ultrafilter GmbH looks back on a long lasting experience in developing and producing heat regenerated adsorption dryers for different applications.
- Only the best components that meet the high quality standards of production are used. The Quality Assurance system according to ISO 9001 means that all appliances receive the "Quality Product" certification.
- All ultrafilter purification components convince by their service- and maintenance-friendly construction. ultrafilter adsorption dryer ensure highest operational safety and reliability and guarantee lowest possible total cost of ownership.

ULTRA.DRY HRE Standards:

- high energy efficiency
- high reserve capacity
- reliability
- safe operation, easy to maintain
- pneumatic box for sensitive components
- high corrosion resistance due to HT galv. pipework
- easy to ship due to compact dimensions
- switch over control

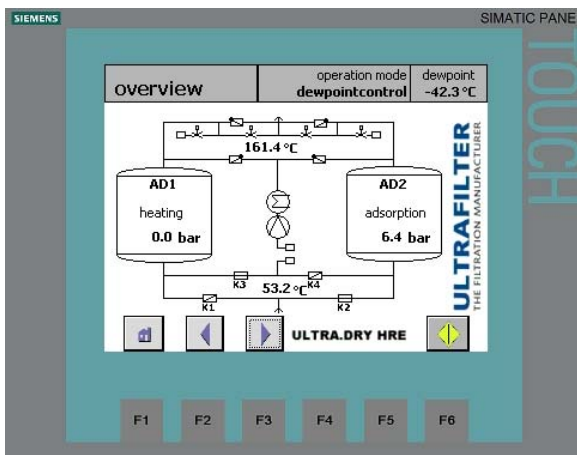


ULTRA.DRY HRE Heat Regenerated Adsorption Dryer

NEW

Technical Data


Size ULTRA.DRY HRE	Volume Flow V_{nom} m ³ /h	Connection DIN2633 DN	Dimensions			Weight kg	Installed Power Blower kW	Installed Power Heater kW
			Width W mm	Depth D mm	Height H mm			
0400	400	50	1.750	1.030	2.260	1.200	1,5	6,0
0700	700	50	1.800	1.150	2.310	1.400	2,0	9,0
1000	1000	80	1.920	1.280	2.390	1.500	2,0	12,0
1400	1400	80	1.920	1.320	2.420	1.900	3,0	16,5
1700	1700	80	2.120	1.450	2.480	2.300	3,0	19,5
2000	2000	80	2.160	1.470	2.550	2.800	5,5	24,0
2500	2500	100	2.260	1.600	2.630	3.400	5,5	30,0
3000	3000	100	2.320	1.540	2.630	3.600	8,5	40,5
3500	3500	100	2.750	1.910	2.790	4.000	8,5	45,0
4000	4000	150	2.800	1.790	2.890	4.800	7,5	45,0
5000	5000	150	2.910	2.010	2.870	5.600	7,5	60,0
6000	6000	150	3.400	2.380	2.910	6.300	11,0	70,5
7000	7000	150	3.500	2.300	2.990	7.200	11,0	81,0
8200	8200	150	3.600	2.500	3.100	8.000	11,0	81,0
9500	9500	200	3.700	2.600	3.300	9.400	11,0	94,5

Volume Flow V_{nom} in m³/h related to 20 °C and 1 bar abs suction condition of compressor, 7 bar g operating pressure and 35 °C inlet temperature.



ULTRA.DRY HRE Options:

- dew point control
- skid mounted filters
- bypass complete with valves
- start up device
- heat insulation
- proximity switches for valve position control
- flow meter
- special control systems S7 300 instead of S7 200
- data logger
- pressure relief valves
- shrinking foil packaging

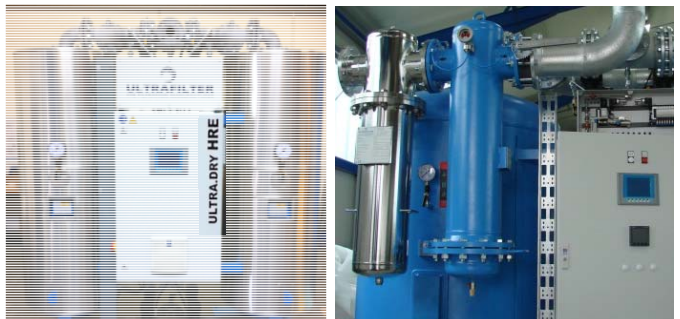



ultrafilter trykluftprogram:

ultrafilter valideret trykluft program indenfor, filter, Køletørrer samt adsorptionstørrer.

—

ultrafilter validated Compressed air filter program with filter, dryer and desiccant dryer.



Trykluftfilter:

Trykluftfilter til brug for håndværkere, værksteder og til mindre kritiske applikation i industrien.

—

Compressed air filter for use by craftsmen, workshops, and for less critical applications in the industry.



Procesfiltrering:

Procesfilter for luft og Gas samt væskefiltrering fra 3M / Cuno , sterilfilter, dampfilter samt Membran filtrering.

—

Process filter for air / gas and liquid filtration, sterile filter steam filter, and Membran filtration.



Vandfilter

Stort program for vandfilter fra Cuno & 3M

—

A wide range of water filter from Cuno & 3M



Nitrogen og Oxygen systemer

Produktion af egen nitrogen eller oxygen, med et modul opbygget system som kan udvides efter behov.

—

Producing own nitrogen or oxygen, with a modular system which can be expanded as needed.



Måleinstrumenter

Måleudstyr til måling og overvågning af trykluft- og nitrogen udstyr.

—

Measuring equipment for measuring and monitoring of compressed air and nitrogen plant.



Service:

Vi tilbyder opstart og montering af alle vores produkter. og kan tilbyde serviceaftaler på alle vores produkter.

Vi har samarbejdspartner i Danmark, Sverige, Norge, Finland, og Island.

—

We offer start-up and installation of all our products. And we can offer service on all our products. We have partner in Denmark, Sweden, Norway, Finland, Iceland.